


MOTUL MICRO

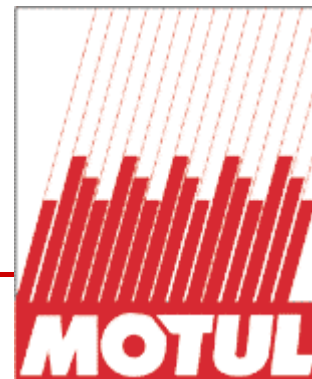

2 stroke engine lubricant for model vehicles

100 % synthetic

Miscible with methanol

TYPE OF USE

100% synthetic lubricant specially formulated for 2 stroke engine model vehicles :
(model cars, boats, planes, etc...)
Entirely miscible with nitromethane, methanol, ether...

PERFORMANCE

Highly resistant to mechanical efforts, it avoids sticking.
Keeps the engine clean (no deposits).
Very stable during storage and cold weather.
Miscible with nitromethane, methanol and ether.
Anti-corrosion. Anti-rust.

RECOMMENDATIONS

MOTUL MICRO can be mixed with methanol, nitromethane or ether according to the following proportions (15 to 20% depending on the use and manufacturer's recommendations) :

MOTUL MICRO	15 - 20%
METHANOL	70 - 75%
NITROMETHANE	10%

Adjust dosage according to your own use or experience.

PROPERTIES

Red colour.	
Density at 15°C / 59°F	0.998
Viscosity at 40°C / 104°F	180 mm ² /s
Viscosity at 100°C / 212°F	30 mm ² /s
Viscosity index	213
Flash point	224°C / 435°F
Pour point	-35 °C / -31°F